





DOUBLE PITCH ROLLER CHAIN

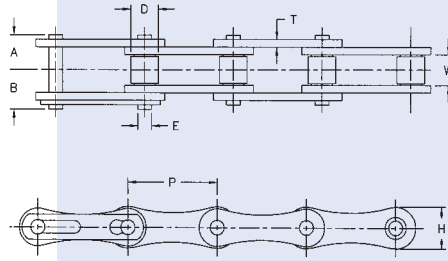

DRIVE SERIES

Dimensions In Inches										
ANSI Chain No.	Pitch P	Roller		Riv. End to Center Line A	Conn. End to Center Line B	Link Plate		Pin Dia. E	Avg. Ultimate Strength Lbs.	Avg. Weight Lbs./Ft.
		Width W	Dia. D			Height H	Thickness T			
		W	D			H	T			
A2040	1	.312	.312	.321	.368	.475	.058	.156	3,970	0.28
A2050	1 1/4	.375	.400	.399	.455	.594	.079	.200	6,620	0.46
A2060	1 1/2	.500	.469	.497	.551	.712	.093	.234	9,270	0.64
A2080	2	.625	.625	.725	.873	.950	.157	.312	12,460	1.24

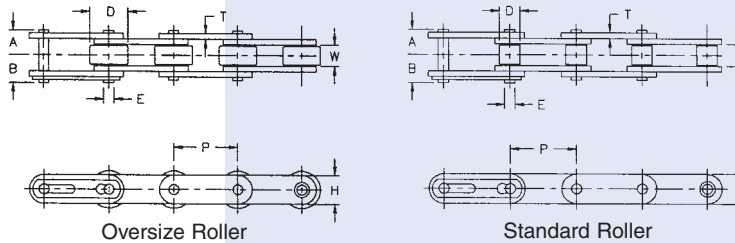

CONVEYOR SERIES

Dimensions In Inches										
ANSI Chain No.	Pitch P	Roller		Riv. End to Center Line A	Conn. End to Center Line B	Link Plate		Pin Dia. E	Avg. Ultimate Strength Lbs.	Avg. Weight Lbs./Ft.
		Width W	Dia. D			Height H	Thickness T			
		W	D			H	T			
STANDARD ROLLER TYPE										
C2040	1	.312	.312	.321	.368	.475	.058	.156	3,970	0.32
C2050	1 1/4	.375	.400	.399	.455	.594	.079	.200	6,620	0.54
C2060	1 1/2	.500	.469	.497	.551	.712	.093	.234	9,270	0.76
C2060H	1 1/2	.500	.469	.570	.625	.712	.125	.234	12,130	0.95
C2080H	2	.625	.625	.720	.873	.950	.157	.312	19,850	1.60
C2100H	2 1/2	.750	.750	.845	1.002	1.188	.189	.375	30,870	2.46
C2120H	3	1.000	.875	1.066	1.259	1.425	.219	.437	36,390	3.48
C2160H	4	1.250	1.125	1.339	1.536	1.901	.281	.563	61,740	5.75
OVERSIZE ROLLER TYPE										
C2042	1	.312	.625	.321	.368	.475	.058	.156	3,970	0.56
C2052	1 1/4	.375	.750	.399	.455	.594	.079	.200	6,620	0.85
C2062H	1 1/2	.500	.875	.570	.625	.712	.125	.234	12,130	1.42
C2082H	2	.625	1.125	.720	.873	.950	.157	.312	19,850	2.31
C2102H	2 1/2	.750	1.562	.845	1.002	1.188	.189	.375	30,870	3.95
C2122H	3	1.000	1.751	1.066	1.259	1.425	.219	.437	36,390	5.44
C2162H	4	1.250	2.251	1.339	1.536	1.901	.281	.563	61,740	8.79

Allied-Locke Industries Inc.

... chain - sprockets - buckets
www.alliedlocke.com