


# SEGMENTAL RIM TRACTION WHEELS CAST IRON



## TRACTION WHEEL [WITH BOLTS, WASHERS & NUTS] CHILLED RIM AVAILABLE

CHAIN NUMBER	OUT SIDE DIAMETER	BODY NUMBER	FACE WIDTH	WEIGHT LBS.
88	14	80	1 <sup>5</sup> / <sub>8</sub>	95
88	15	100	1 <sup>5</sup> / <sub>8</sub>	98
88	20	120	1 <sup>5</sup> / <sub>8</sub>	105
C-102B	12	80	1 <sup>7</sup> / <sub>8</sub>	98
C-102B	14	80	1 <sup>7</sup> / <sub>8</sub>	95
C-102B	16	100	1 <sup>7</sup> / <sub>8</sub>	74
C-102B	18	120	1 <sup>7</sup> / <sub>8</sub>	88
C-102B	19 <sup>3</sup> / <sub>4</sub>	120	1 <sup>7</sup> / <sub>8</sub>	110
C-102B	23 <sup>3</sup> / <sub>4</sub>	160	1 <sup>7</sup> / <sub>8</sub>	125
C-102B	27	200	1 <sup>7</sup> / <sub>8</sub>	140
C-102B	29 <sup>1</sup> / <sub>4</sub>	290	1 <sup>7</sup> / <sub>8</sub>	92
C-111	15 <sup>1</sup> / <sub>2</sub>	100	2 <sup>5</sup> / <sub>8</sub>	100
C-111	20	160	2 <sup>5</sup> / <sub>8</sub>	128
C-111	22	160	2 <sup>5</sup> / <sub>8</sub>	134
C-111	24	160	2 <sup>5</sup> / <sub>8</sub>	145
C-111	26	200	2 <sup>5</sup> / <sub>8</sub>	157
C-111	30	290	2 <sup>5</sup> / <sub>8</sub>	170
C-132	21 <sup>1</sup> / <sub>2</sub>	160	2 <sup>3</sup> / <sub>4</sub>	125
C-132	24	160	2 <sup>3</sup> / <sub>4</sub>	135
850	20	120	2 <sup>3</sup> / <sub>4</sub>	98
850	24	160	2 <sup>3</sup> / <sub>4</sub>	135
850	26	200	2 <sup>3</sup> / <sub>4</sub>	155
850	27 <sup>3</sup> / <sub>4</sub>	200	2 <sup>3</sup> / <sub>4</sub>	180
850	30	290	2 <sup>3</sup> / <sub>4</sub>	195
850*	20	160	3 <sup>1</sup> / <sub>2</sub>	132

**NOTE:** For C-110 and C-102<sup>1</sup>/<sub>2</sub> Seg. Rim Traction Wheels Refer to C-102B.

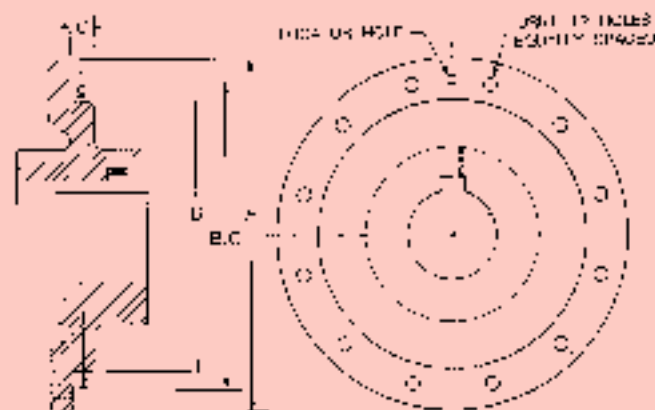

### BASIC BODY DESIGN

For use with Segmental sprocket Wheels and Traction Wheels. Design permits reversing rims for double life and central wheel location relative to the hubs.