



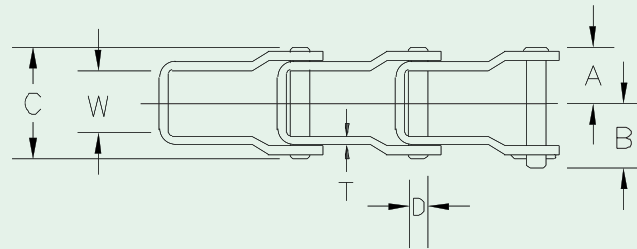

STEEL PINTLE CHAIN

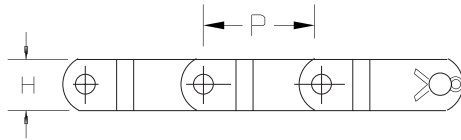

AL662, AL667H, AL667X, AL667XH, AL88K, AL88XH, AL58

| Chain Size | Links Per 10' | Wt. Per 10' | Min. Avg. Tensile Strength | Pitch | Overall Width | Inside Width | Pin Dia. | Height | Thickness | Connector Length | |
|------------|---------------|-------------|----------------------------|-------|---------------------------------|---------------------------------|----------|--------|-----------|------------------|-------|
| | | | | P | B | C | D | H | T | A | B |
| AL662 | 72 | 10.5 lbs. | 8,500 lbs. | 1.664 | 1 ⁵ / ₈ | 29 ³ / ₃₂ | .281 | .720 | .125 | .797 | .883 |
| AL667H | 52 | 11.7 lbs. | 9,500 lbs. | 2.313 | 1 ⁴⁷ / ₆₄ | 1 | .312 | .875 | .125 | .891 | .998 |
| AL667X | 53 | 18.6 lbs. | 15,000 lbs. | 2.250 | 1 ⁶¹ / ₆₄ | 1 ¹ / ₁₆ | .437 | .937 | .170 | 1.010 | 1.140 |
| AL667XH | 53 | 28.0 lbs. | 26,000 lbs. | 2.250 | 2 ⁵ / ₁₆ | 1 ⁵ / ₆₄ | .469 | 1.062 | .224 | 1.200 | 1.340 |
| AL88K | 46 | 23.0 lbs. | 20,000 lbs. | 2.609 | 2 ¹ / ₈ | 1 ⁵ / ₆₄ | .437 | 1.062 | .200 | 1.090 | 1.270 |
| AL88XH | 46 | 33.2 lbs. | 30,000 lbs. | 2.609 | 2 ⁴¹ / ₆₄ | 1 ¹ / ₄ | .500 | 1.125 | .250 | 1.350 | 1.520 |
| AL58 | 30 | 55.0 lbs. | 50,000 lbs. | 4.000 | 3 ²³ / ₆₄ | 2 ¹ / ₃₂ | .625 | 1.500 | .310 | 1.870 | 2.090 |

Allied-Locke Industries Inc.

... the company that delivers

Toll Free:

Phone: 800-435-7752

Fax: 800-462-3130

Local:

Phone: 815-288-1471

Fax: 815-288-7945

www.alliedlocke.com