





STRAIGHT SIDEBAR CHAIN

NON-STANDARD SERIES CHAIN

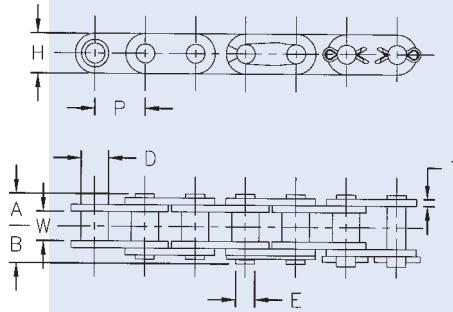

STRAIGHT SIDEBAR CHAIN

Dimensions In Inches										
ANSI Chain No.	Pitch P	Roller		Riv. End to Center Line A	Conn. End to Center Line B	Link Plate		Pin Dia. E	Avg. Ultimate Strength Lbs.	Avg. Weight Lbs./Ft.
		Width W	Dia. D			Height H	Thickness T			
C40	1/2	.312	.312	.321	.368	.475	.058	.156	3,970	0.44
C50	5/8	.375	.400	.399	.455	.594	.079	.200	6,620	0.73
C60	3/4	.500	.469	.497	.551	.712	.093	.234	9,270	1.03
C80	1	.625	.625	.645	.724	.950	.125	.312	15,880	1.82

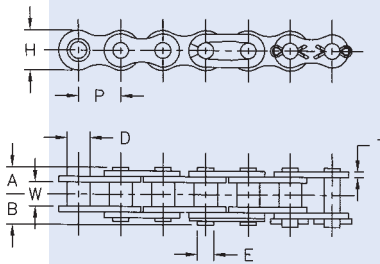

NON-STANDARD

Dimensions In Inches										
ANSI Chain No.	Pitch P	Roller		Riv. End to Center Line A	Conn. End to Center Line B	Link Plate		Pin Dia. E	Avg. Ultimate Strength Lbs.	Avg. Weight Lbs./Ft.
		Width W	Dia. D			Height H	Thickness T			
410(43)(65)	1/2	.125	.305	.182	.226	.390	.040	.142	2,210	.19
415(42)	1/2	.187	.305	.212	.256	.390	.040	.142	2,210	.22
415H	1/2	.187	.305	.299	.299	.451	.058	.165	3,750	.33
420	1/2	.250	.305	.328	.328	.457	.058	.156	3,970	.38
423	1/2	.250	.335	.285	.328	.456	.058	.175	4,080	.40
428	1/2	.312	.335	.361	.361	.456	.058	.175	4,080	.44
428H	1/2	.312	.335	.406	.406	.456	.079	.175	5,080	.52
520	5/8	.250	.400	.371	.371	.594	.079	.200	6,620	.60
530	5/8	.375	.400	.444	.444	.594	.079	.200	6,620	.68