




NICKEL PLATED CHAIN

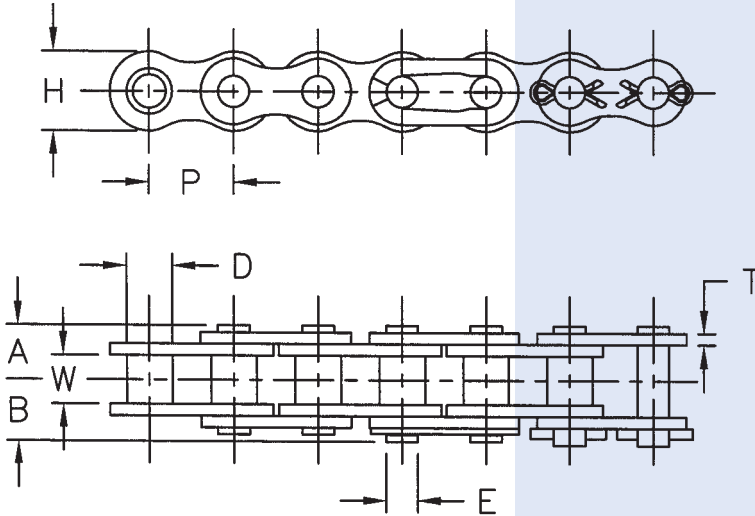

Plated roller chain is standard chain which is nickel-plated before assembly. It features a sheen and has the property of being resistant to corrosion, together with almost the same strength and wear resistance as standard roller chain.

This makes it ideal for use with machines which must be kept highly clean, such as food processing equipment, textile machines, business machines, and printing machines. In addition, the corrosion resistant feature of nickel-plated chain permits its use either underwater or in places where conditions of high humidity prevail.

"NP" is added to the chain number for identification.

ANSI Chain No.	Dimensions In Inches									
	Pitch	Roller		Riv. End to Center Line	Conn. End to Center Line	Link Plate		Pin Dia.	Avg. Ultimate Strength	Avg. Weight
		Width	Dia.			Height	Thickness			
	P	W	D	A	B	H	T	E	Lbs.	Lbs./Ft.
25 NP	1/4	.125	.130	.153	.189	.228	.029	.091	930	0.09
35 NP	3/8	.187	.200	.228	.276	.356	.050	.141	2,320	0.22
40 NP	1/2	.312	.312	.321	.368	.475	.058	.156	3,970	0.42
41 NP	1/2	.250	.306	.261	.314	.390	.050	.141	2,760	0.28
410(43)NP	1/2	.125	.305	.182	.226	.390	.040	.142	2,210	0.19
50 NP	5/8	.375	.400	.399	.455	.594	.079	.200	6,620	0.68
60 NP	3/4	.500	.469	.497	.551	.712	.093	.234	9,270	0.97
80 NP	1	.625	.625	.645	.724	.950	.125	.312	16,540	1.71
100 NP	1 1/4	.750	.750	.789	.941	1.188	.157	.375	25,360	2.65
35-2 NP	3/8	.187	.200	.438	.468	.356	.050	.141	4,640	0.42
40-2 NP	1/2	.312	.312	.606	.661	.475	.058	.156	7,500	0.82
50-2 NP	5/8	.375	.400	.752	.807	.594	.079	.200	13,230	1.34
60-2 NP	3/4	.500	.469	.945	1.000	.712	.093	.234	18,530	1.93
80-2 NP	1	.625	.625	1.220	1.303	.950	.125	.312	33,080	3.39
A2040 NP	1	.312	.312	.321	.368	.475	.058	.156	3,970	0.28
A2050 NP	1 1/4	.375	.400	.399	.455	.594	.079	.200	6,620	0.46
A2060 NP	1 1/2	.500	.469	.497	.551	.712	.093	.234	9,270	0.64
C2040 NP	1	.312	.312	.321	.368	.475	.058	.156	3,970	0.32
C2050 NP	1 1/4	.375	.400	.399	.455	.594	.079	.200	6,620	0.54
C2060H NP	1 1/2	.500	.469	.570	.625	.712	.125	.234	12,130	0.95
C2080H NP	2	.625	.625	.720	.873	.950	.157	.312	19,850	1.60

Allied-Locke Industries Inc.

... reach for the star of quality
www.alliedlocke.com